


Push → to Open Hidden Menu

← → → ← Push joystick for 1 beep
 ← ← → → Push joystick for 2 beeps

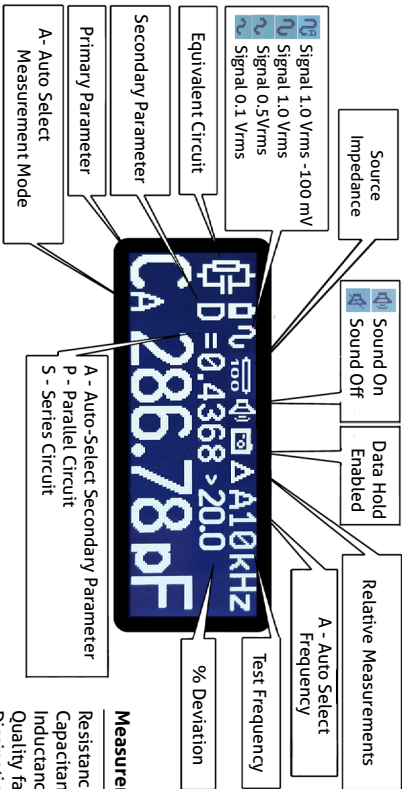

Measurement Ranges

Resistance R:	5 mΩ to 20 MΩ
Capacitance C:	1 pF to 680 mF
Inductance L:	10 nH to 100 mH
Quality factor Q:	0.001 to 1000
Dissipation factor D:	0.001 to 1000

Technical Specifications

Test Signal: 1.0, 0.5, 0.1 Vrms
 Test Signal Frequency: 100 Hz, 120 Hz, 1 kHz, 10 kHz, 100 kHz, 250 kHz
 Test Frequency Accuracy: ±(0.005%+5) Hz
 Source Resistance: 100 Ohms

Physical Specifications

Size: 166 x 23 x 14 mm (6.5 x 0.9 x 0.5 in.)
 Weight: 35 grams (1.23 oz.)
 Operating temperature: 10°C to 40°C
 Battery Type: 3.7V LiPO Rechargeable 250mAh
 Battery Life (continuous): Over 8 hours (without backlight)



Siborg Systems Inc.
 24 Combermere Crescent,
 Waterloo, Ontario, Canada

www.LCR-Reader.com

DISCHARGE CAPACITORS BEFORE TESTING

